



— **özdoğan** —

**SEEDERS**




### PERTUM

**PERTUM SERIES UNTIL 300 CM WORKING WIDTH WITH 6.00X15 TYRES**

**PERTUM SERIES FROM 350 TO 400 CM WORKING WIDTH WITH 10.0/75-15.3 TYRES**



**PERTUM-CF**

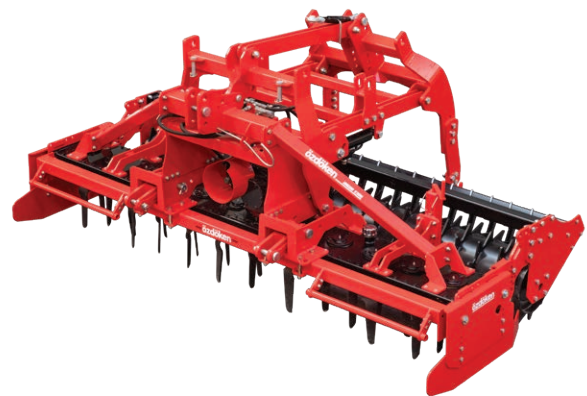

**ONGUN-S300**


**STANDARD**



**SINGLE DISC ROW UNIT**

Single disc has standarty with seed pressure wheel which allows precise seeding depth even on small seeds.

**STANDARD**

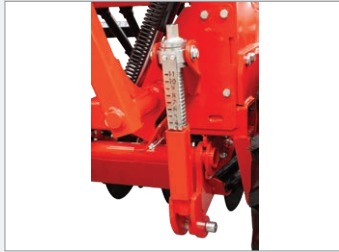

**PRESSURE AND DEPTH ADJUSTMENT**

Pressure adjustment can be adjusted mechanically.


**STANDARD**



**VARIO GEARBOX**

With the help of variable gearbox seed are sown from 1,5 kg to 400 kg. Dosage meter can be easily adjusted according to seed size.

**STANDARD**

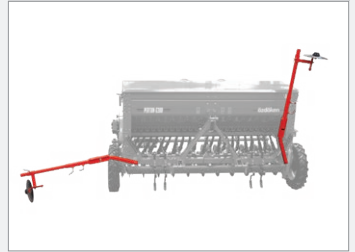

**DOUBLE HYDRAULIC ROW MARKER**

All Pertum models have double hydraulic row markers standarty.

**STANDARD**



**DOSAGE METER FOR ALL KIND OF GRAINS**

The dosage meter has 2 type of rollers to seed small and normal size seeds . The seed change is very easy without roller change.

**STANDARD**



**FOLLOWING TINES**

Easy to change depth and angle adjustment of following tines.

**STANDARD**



**6.00x16 TYRE**

Available for 250 and 300 cm working width.

**STANDARD**



**10.0/75-15.3 TYRE**

Available for 350 and 400 cm working width.


**OPTIONAL**



**FERTILIZER KIT**

All Pertum models have fertilizer hopper option.


**OPTIONAL**

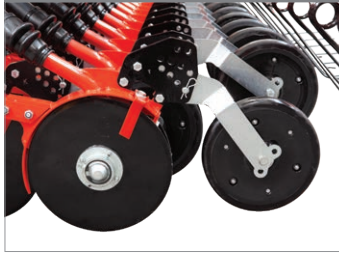

**DOUBLE DISC ROW UNIT**

Optional "V" shape double disc has standarty equipped with seed pressure wheel.

**OPTIONAL**

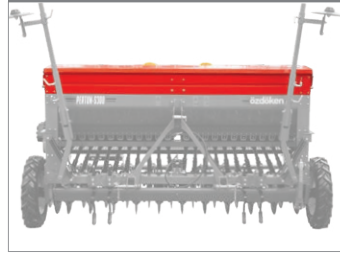

**HOPPER EXTENSION**

All Pertum models has extension kit optionally for extra hopper capacity.

**OPTIONAL**



**TRACK ERADICATOR**

Track eradicator can be equipped optionally to loose track of the track wheels.

**OPTIONAL**



**BASIC TRAMLINE**

Basic tramline has automatic row shut of system with actuator.

**STANDARD**



**EXTENSION FOR 3 POINT LINKAGE**

### STANDARD



#### COULTER TYPE ROW UNIT

PERTUM-C series grain seeder is suitable for use in application areas of minimum tillage. Thanks to the coulters type seeding units positioned in 3 rows and its solid chassis structure, it works without any problems even in stony conditions.


### STANDARD



#### VARIO GEARBOX

With the help of variable gearbox seed are sown from 1,5 kg to 400 kg. Dosage meter can be easily adjusted according to seed size.

### OPTIONAL

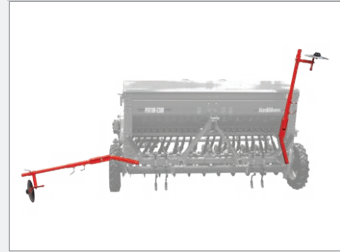

#### DOUBLE HYDRAULIC ROW MARKER

All Pertum-C models have double hydraulic row markers optionally.


### STANDARD



#### DOSAGE METER FOR ALL KIND OF GRAINS

The dosage meter has 2 type of rollers to seed small and normal size seeds. The seed change is very easy without roller change.


### STANDARD

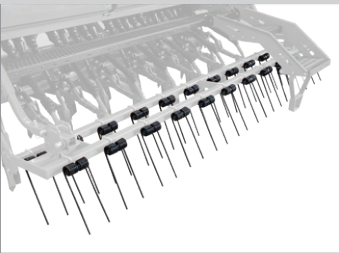

#### FOLLOWING TINES

Easy to change depth and angle adjustment of following tines.


### STANDARD

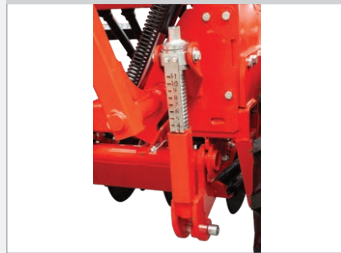

#### PRESSURE AND DEPTH ADJUSTMENT

Pressure adjustment can be adjusted mechanically.

### OPTIONAL

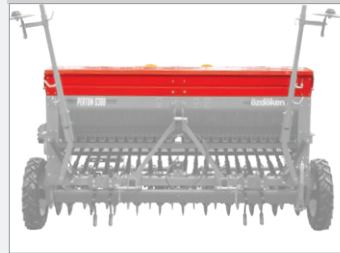

#### HOPPER EXTENSION

All Pertum-C models have extension kit optionally in order to have extra capacity.


### OPTIONAL



#### BASIC TRAMLIN

Basic tramline has automatic row shut-off system with actuator.

### STANDARD

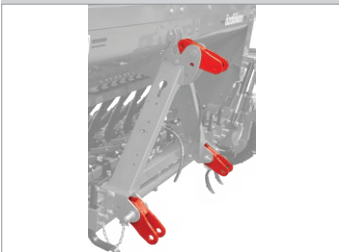

#### EXTENSION FOR 3 POINT LINKAGE

### STANDARD



#### 7.50x16 TYRE

Standard for 250 and 300 cm working width versions.

### STANDARD



#### 10.0/75-15.3 TYRE

Standard for 350 and 400 cm working width versions.  
Optional for 250 and 300 cm working width versions.

### OPTIONAL



#### FERTILIZER KIT

Pertum-C models have fertilizer kit optionally.



**ONGUN-S300**



**STANDARD**

**320 MM PACKER ROLLER**



**STANDARD**

**2 BLADES ROTOR**



**STANDARD**

**MECHANICAL DEPTH ADJUSTMENT**



**STANDARD**

**SEED DRILL ATTACHMENT**

PERTUM SERIES						
MODEL	NUMBER OF ROW UNITS	ROW SPACE	WORKING WIDTH	TRANSPORT WIDTH	TYRE SIZE	WEIGHT
	pcs	cm	cm	cm		kg
<b>PERTUM-S250</b>	20	12,5	250	250	6.00X16	860
<b>PERTUM-S300</b>	24	12,5	300	300	6.00X16	1050
<b>PERTUM-S350</b>	28	12,5	350	360	10.0/75-15.3	1180
<b>PERTUM-S400</b>	32	12,5	400	410	10.0/75-15.3	1365
<b>PERTUM-F250</b>	20	12,5	250	250	6.00X16	930
<b>PERTUM-F300</b>	24	12,5	300	300	6.00X16	1130
<b>PERTUM-F350</b>	28	12,5	350	360	10.0/75-15.3	1270
<b>PERTUM-F400</b>	32	12,5	400	410	10.0/75-15.3	1450

PERTUM SERIES					
MODEL	SEED HOPPER CAPACITY	FERTILIZER HOPPER CAPACITY	SEED HOPPER CAPACITY WITH EXTENSION	FERTILIZER HOPPER CAPACITY WITH EXTENSION	POWER REQUIREMENT
	lt	lt	lt	lt	hp
<b>PERTUM-S250</b>	480	-	-	-	50-70
<b>PERTUM-S300</b>	590	-	950	-	60-80
<b>PERTUM-S350</b>	700	-	1225	-	70-90
<b>PERTUM-S400</b>	830	-	1330	-	80-110
<b>PERTUM-F250</b>	240	250	-	-	50-70
<b>PERTUM-F300</b>	295	310	485	480	60-80
<b>PERTUM-F350</b>	350	370	575	570	70-90
<b>PERTUM-F400</b>	410	430	670	670	80-110

PERTUM-C SERIES						
MODEL	NUMBER OF ROW UNITS	ROW SPACE	WORKING WIDTH	TRANSPORT WIDTH	TYRE SIZE	WEIGHT
	pcs	cm	cm	cm		kg
<b>PERTUM-CS250</b>	18	12,5	225	250	7.50X16	780
<b>PERTUM-CS300</b>	22	13	285	300	7.50X16	970
<b>PERTUM-CS350</b>	26	12,5	325	350	11.5X80-15.3	1100
<b>PERTUM-CS400</b>	30	12,5	375	400	11.5X80-15.3	1280
<b>PERTUM-CF250</b>	18	12,5	225	250	7.50X16	850
<b>PERTUM-CF300</b>	22	13	285	300	7.50X16	1040
<b>PERTUM-CF350</b>	26	12,5	325	350	11.5X80-15.3	1190
<b>PERTUM-CF400</b>	30	12,5	375	400	11.5X80-15.3	1370

PERTUM-C SERIES					
MODEL	SEED HOPPER CAPACITY	FERTILIZER HOPPER CAPACITY	SEED HOPPER CAPACITY WITH EXTENSION	FERTILIZER HOPPER CAPACITY WITH EXTENSION	POWER REQUIREMENT
	lt	lt	lt	lt	hp
<b>PERTUM-CS250</b>	480	-	-	-	50-70
<b>PERTUM-CS300</b>	590	-	950	-	60-80
<b>PERTUM-CS350</b>	700	-	1225	-	70-90
<b>PERTUM-CS400</b>	830	-	1330	-	80-110
<b>PERTUM-CF250</b>	240	250	-	-	50-70
<b>PERTUM-CF300</b>	295	310	485	480	60-80
<b>PERTUM-CF350</b>	350	370	575	570	70-90
<b>PERTUM-CF400</b>	410	430	670	670	80-110

ONGUN-S300						
MODEL	NUMBER OF ROW UNITS	WORKING WIDTH	TRANSPORT WIDTH	WORKING DEPTH	WEIGHT	POWER REQUIREMENT
	pcs	cm	cm	cm	kg	hp
<b>ONGUN-S300</b>	12	300	300	30	1700	160 - 250

# özdoğan



[ozdoken.com.tr](http://ozdoken.com.tr)

📍 Horozluhan Osb Mahallesi Bayrampaşa Caddesi  
Güvençli Sokak No: 5 Selçuklu/KONYA

☎ +90 332 251 67 20

☎ +90 332 249 09 86

✉ [info@ozdoken.com.tr](mailto:info@ozdoken.com.tr)

V2.0 - 10.2022

# özdoğan